


1 to 100 Gb Ethernet

Introducing the Intel® Ethernet 800 Series

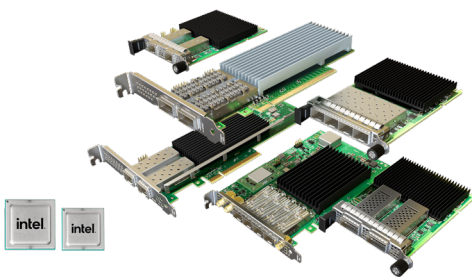

Intel® Ethernet 800 Series Network Adapters support speeds up to 100Gbps and include innovative and versatile capabilities to optimize workload performance.

Performance for Cloud Applications

Delivers the bandwidth and increased application throughput required for demanding cloud workloads including edge services, web servers, database applications, caching servers, and storage targets.

Optimizations for Communications Workloads

Provides packet classification and sorting optimizations for high-bandwidth network and communications workloads, including mobile core, 5G RAN, and network appliances.

Supports Hyperconverged Solutions

The 800 Series broad portfolio of adapters, with different port counts and form factors, delivers performance with efficient use of server processors.

Why Intel® Ethernet

Intel Ethernet E810 Network Adapters offer best-in-class compatibility, performance assurance, and world-class customer support. Key features and technologies deliver outstanding performance and support for data center workloads.

The Intel Ethernet portfolio, with its supported open-platform initiatives, offers a wide range of data center solutions and continues to evolve with reliable off-the-shelf components to address any system size or budget.

Compatibility and interoperability

- Extensive conformance testing to IEEE and Ethernet Technology Consortium standards
- Comprehensive operating system and hypervisor support
- Broad network interoperability testing for best-in-class compatibility

Performance assurance







- Validated on all x86 architectures and optimized for Intel® architecture
- Security protocols and management to ensure data integrity
- Scales with processor cores and technologies

Worldwide product support

- Industry-leading warranty
- World-class customer pre- and post-product support
- Adherence to regulatory and environmental requirements

Intel Ethernet 800 Series Network Adapters

Improve application efficiency and network performance with innovative and versatile capabilities that optimize high-performance server workloads such as NFV, storage, HPC-AI, and hybrid cloud.


Product	Connection	Cabling Type and Range	Speed	Ports	Order Codes
 E830-XXVDA2	SFP28	DAC: up to 5 m SMF: up to 10 km MMF: up to 100 m	25/10GbE	2	E830XXVDA2 E830XXVDA2M
 E810-2CQDA2	QSFP28	DAC: up to 5 m SMF: up to 10 km MMF: up to 100 m	100/50/25/10GbE Note: 100Gbps per port for total bandwidth of 200Gbps	2	E8102CQDA2
 E810-CQDA1*, -CQDA2*	QSFP28	DAC: up to 5 m SMF: up to 10 km MMF: up to 100 m	100/50/25/10GbE	1 or 2	E810CQDA1 E810CQDA2 E810CQDA2BLK
 E810-XXVDA4* (FH, LP)	SFP28	DAC: up to 5 m SMF: up to 10 km MMF: up to 100 m	25/10/1GbE	4	E810XXVDA4 (FH) E810XXVDA4BLK E810XXVDA4LG1P5 (LP)
 E810-XXVDA2*	SFP28	DAC: up to 5 m SMF: up to 10 km MMF: up to 100 m	25/10/1GbE	2	E810XXVDA2 E810XXVDA2BLK
 E810-XXVDA4T for high-precision timing synchronization	SFP28	DAC: up to 5 m SMF: up to 10 km MMF: up to 100 m	25/10/1GbE	4	E810XXVDA4T

*OCP 3.0 form factor available

DAC - direct attach copper, SMF - single-mode fiber, MMF - multi-mode fiber



Versatility and Flexibility for the Data Center

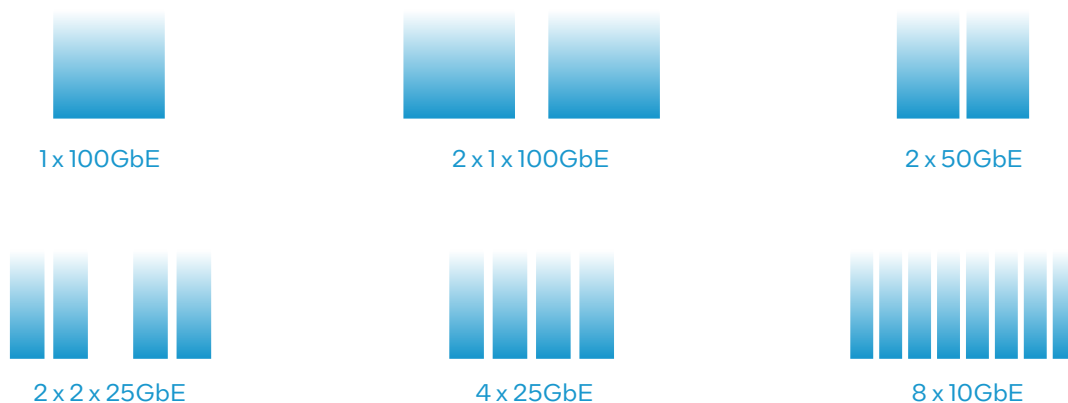The Ethernet Port Configuration Tool is available on 100GbE Intel Ethernet 800 Series Network Adapters¹, and offers a versatile solution for high-density, port-constrained network environments. One port becomes eight 10GbE ports, four 25GbE ports, and more—up to six configurations to choose from.



Intel Ethernet 700 Series Network Adapters

Broad interoperability, critical performance optimizations, and increased agility make 700 Series Network Adapters a good choice for communications, cloud, and data center applications.



Product	Connection	Cabling Type and Range	Speed	Ports	Order Codes
 XXV710-DA2*	SFP28 (DAC and Fiber Optic)	DAC: 25GbE up to 5 m with RS FEC, up to 3 m with no FEC DAC: 10GbE up to 15 m SMF: up to 10 km MMF: up to 70 m (OM3), up to 100 m (OM4)	25/10/1GbE	2	XXV710DA2G1P5
 X710-DA2*, -DA4* (FH)	SFP+ (DAC and Fiber Optic)	DAC: 10 up to 15 m SMF: up to 10 km MMF: up to 300 m (OM3), up to 400 m (OM4)	10/1GbE	2 or 4	X710DA2 X710DA2BLK X710DA4FHBLK X710DA4G2P5

*OCP3.0 form factor available

DAC - direct attach copper, SMF - single-mode fiber, MMF - multi-mode fiber

Simplify Migration to 10GbE with these 700 and 500 Series Network Adapters


10GBASE-T is one of the least-disruptive paths for upgrading from 1000BASE-T. The familiar RJ45 interface simplifies migration, and backwards compatibility allows for a staged approach to higher-speed networks. With 10X performance improvement, migrating from 1 to 10GbE is a solid financial decision that is also budget friendly.

Product	Connection	Cabling Type and Range	Speed	Ports	Order Codes
 X710-T2L*, -T4L*	RJ45	CAT6 up to 55 m CAT6A or better up to 100 m	10/1GbE/100Mb	2 or 4	X710T2L X710T2LBLK X710T4L X710T4LBLK
 X550-T2	RJ45	CAT6 up to 55 m (10GbE) CAT6A or better, up to 100 m (10GbE) CAT5 or better, up to 100 m (5/2.5/1GbE)	10/5/2.5/1GbE/100Mb	2	X550T2

*OCP 3.0 form factor available



2.5Gb Intel Ethernet Network Adapter

This ultra-compact adapter is ideally suited for PCs and workstations used for enterprise, gaming, and home networks needing bandwidth beyond 1Gbps.

Product	Connection	Cabling Type and Range	Speed	Ports	Order Codes
 I226-T1	RJ45	CAT5e, CAT6, CAT6A up to 100 m	2.5/1GbE/100Mb/10Mb	1	I226T1 I226T1BLK

1Gb Intel Ethernet Network Adapters

Get performance-enhancing features and power management technologies with these 1GbE network adapters.

Product	Connection	Cabling Type and Range	Speed	Ports	Order Codes
 I210-T1	RJ45	CAT5 or better up to 100 m	1GbE/100Mb/10Mb	1	I210T1 I210T1BLK
 I350-T2/T4*	RJ45	CAT5 or better up to 100 m	1GbE/100Mb/10Mb	2 or 4	I350T2V2 I350T2V2BLK I350T4V2 I350T4V2BLK

*OCP 3.0 form factor available

Move data faster with Intel® Ethernet products

Learn more at [intel.com/ethernet](https://www.intel.com/ethernet)

*OCP form factors are also available for these adapters. Learn more at [intel.com/ocpnic](https://www.intel.com/ocpnic)
1. EPCT is available on QSFP28 connection-based 100GbE 800 Series Network Adapters.

© Intel Corporation. Intel, the Intel logo, and other Intel marks are trademarks of Intel Corporation or its subsidiaries. Other names and brands may be claimed as the property of others.